

ILS-01343 SHEET 1 OF 3 REV. 4 (7259)(8/4/20)(BHM)

SIDE VIEWS

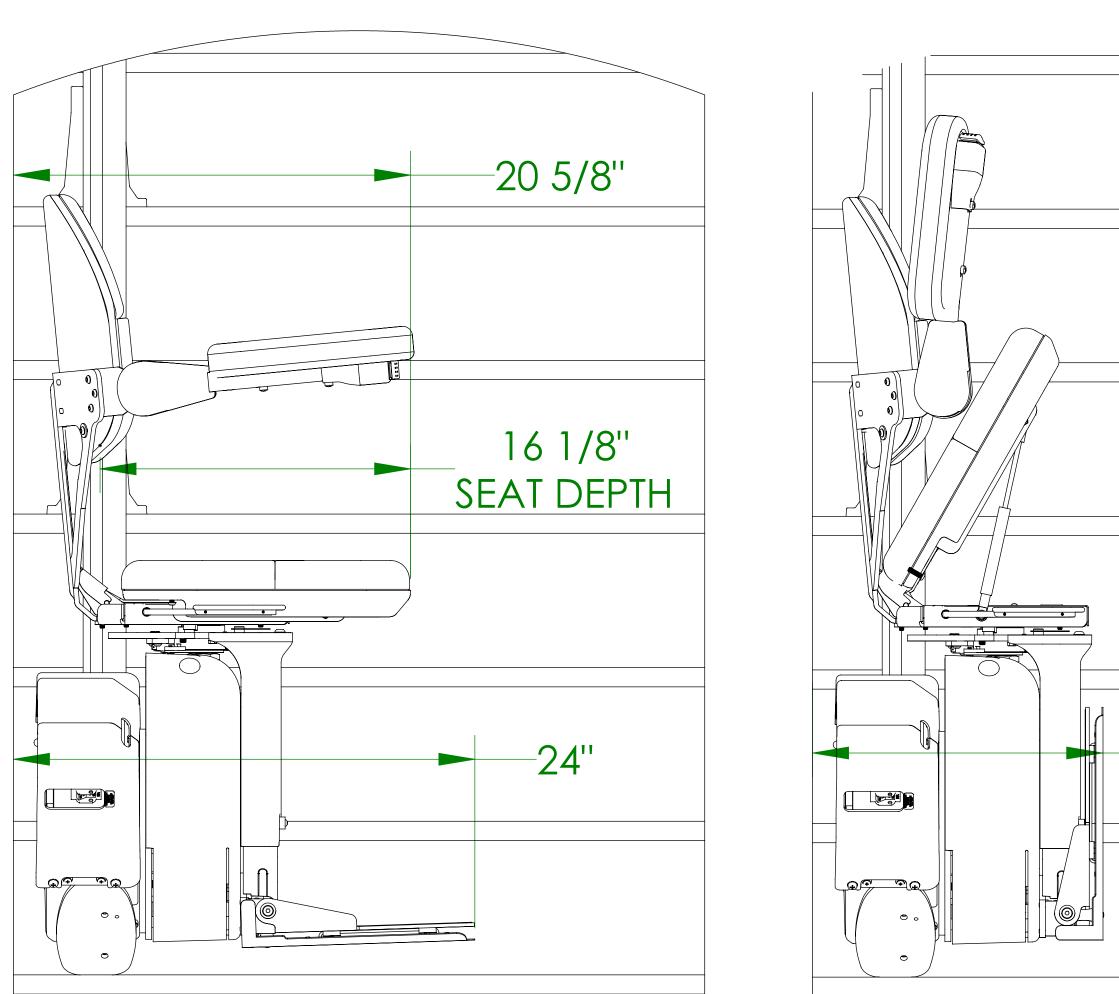

MODEL: SRE-2010 ELITE
RATED LOAD: 400 LBS, ONE PASSENGER
POWER SOURCE: 24 VOLT DC COMPRISED OF
12 VOLT SEALED BATTERIES
100-240 VOLT AC 1.5 AMP, 24
CONTINUOUS MONITORING (
DRIVE: 24 VOLT DC DIRECT DRIVE GEAR-MOTO
RATED .68 HP, 58:1 RIGHT ANGLE SELF LC
GEARBOX, 41.5 RPM NO LOAD RPM OU
SUSPENSION: RACK & PINION - INTEGRATED 8E
ON RAIL WITH A SPUR GEAR ON
SHAFT OF THE GEAR BOX.
BRAKING: DYNAMIC MOTOR BRAKING THROU
CONTROLLER, SELF LOCKING WORK
ELECTRO-MECHANICAL MOTOR BR/
CONTROLS: CONTINUOUS PRESSURE ROCKER S
ON THE ARM REST AND WALL MOU
CONTROLS LOCATED AT BOTH THE
LANDINGS.
ANGLES: 0 TO 45 DEGREES (SPECIALS UP TO 50 OR LEFT HAND ORIENTATIONS.
KEYED CONTROL ON CARRIAGE
FINAL LIMIT SWITCH STANDARD
1) KEYED CALL/SEND CONTROLS,
2) COMMERCIAL PACKAGE W/OVERSPEED S

TECHNICAL DATA/SPECIFICATION

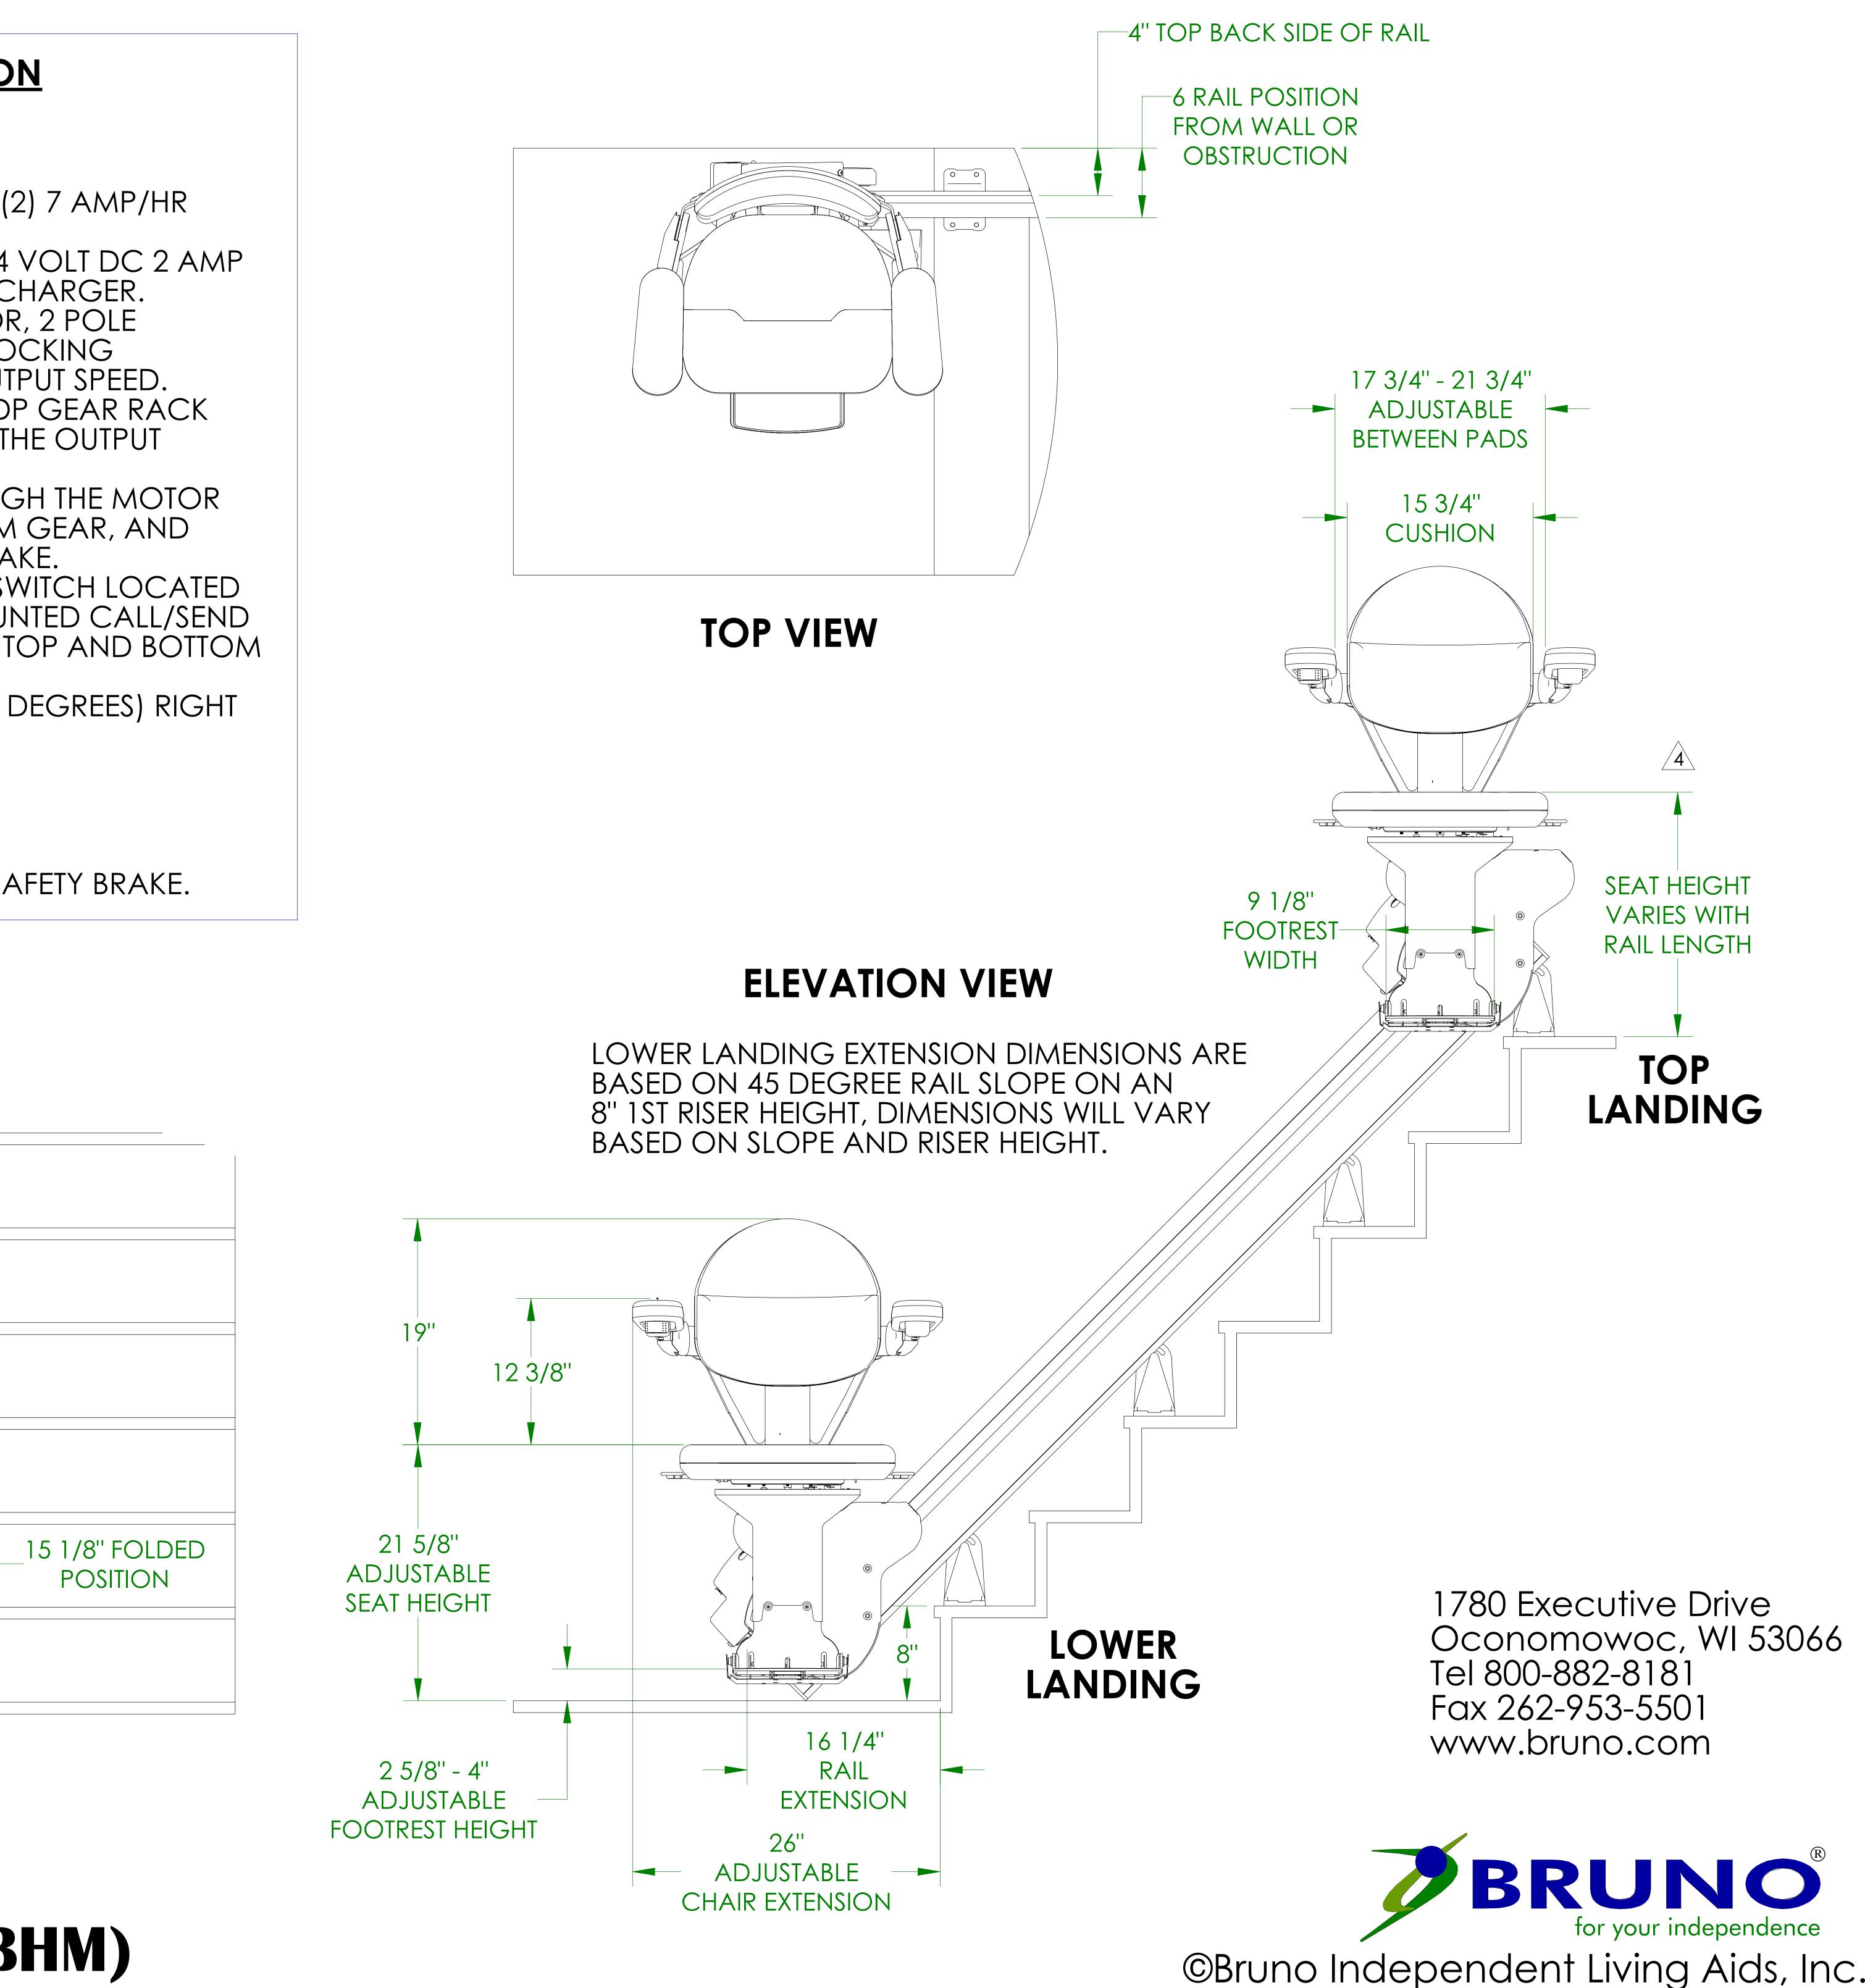


SAFETY BRAKE.

M GEAR, AND AKE. WITCH LOCATED UNTED CALL/SEND TOP AND BOTTOM


R, 2 POLE OCKING JTPUT SPEED. DP GEAR RACK THE OUTPUT JGH THE MOTOR

(2) 7 AMP/HR 4 VOLT DC 2 AMP CHARGER.

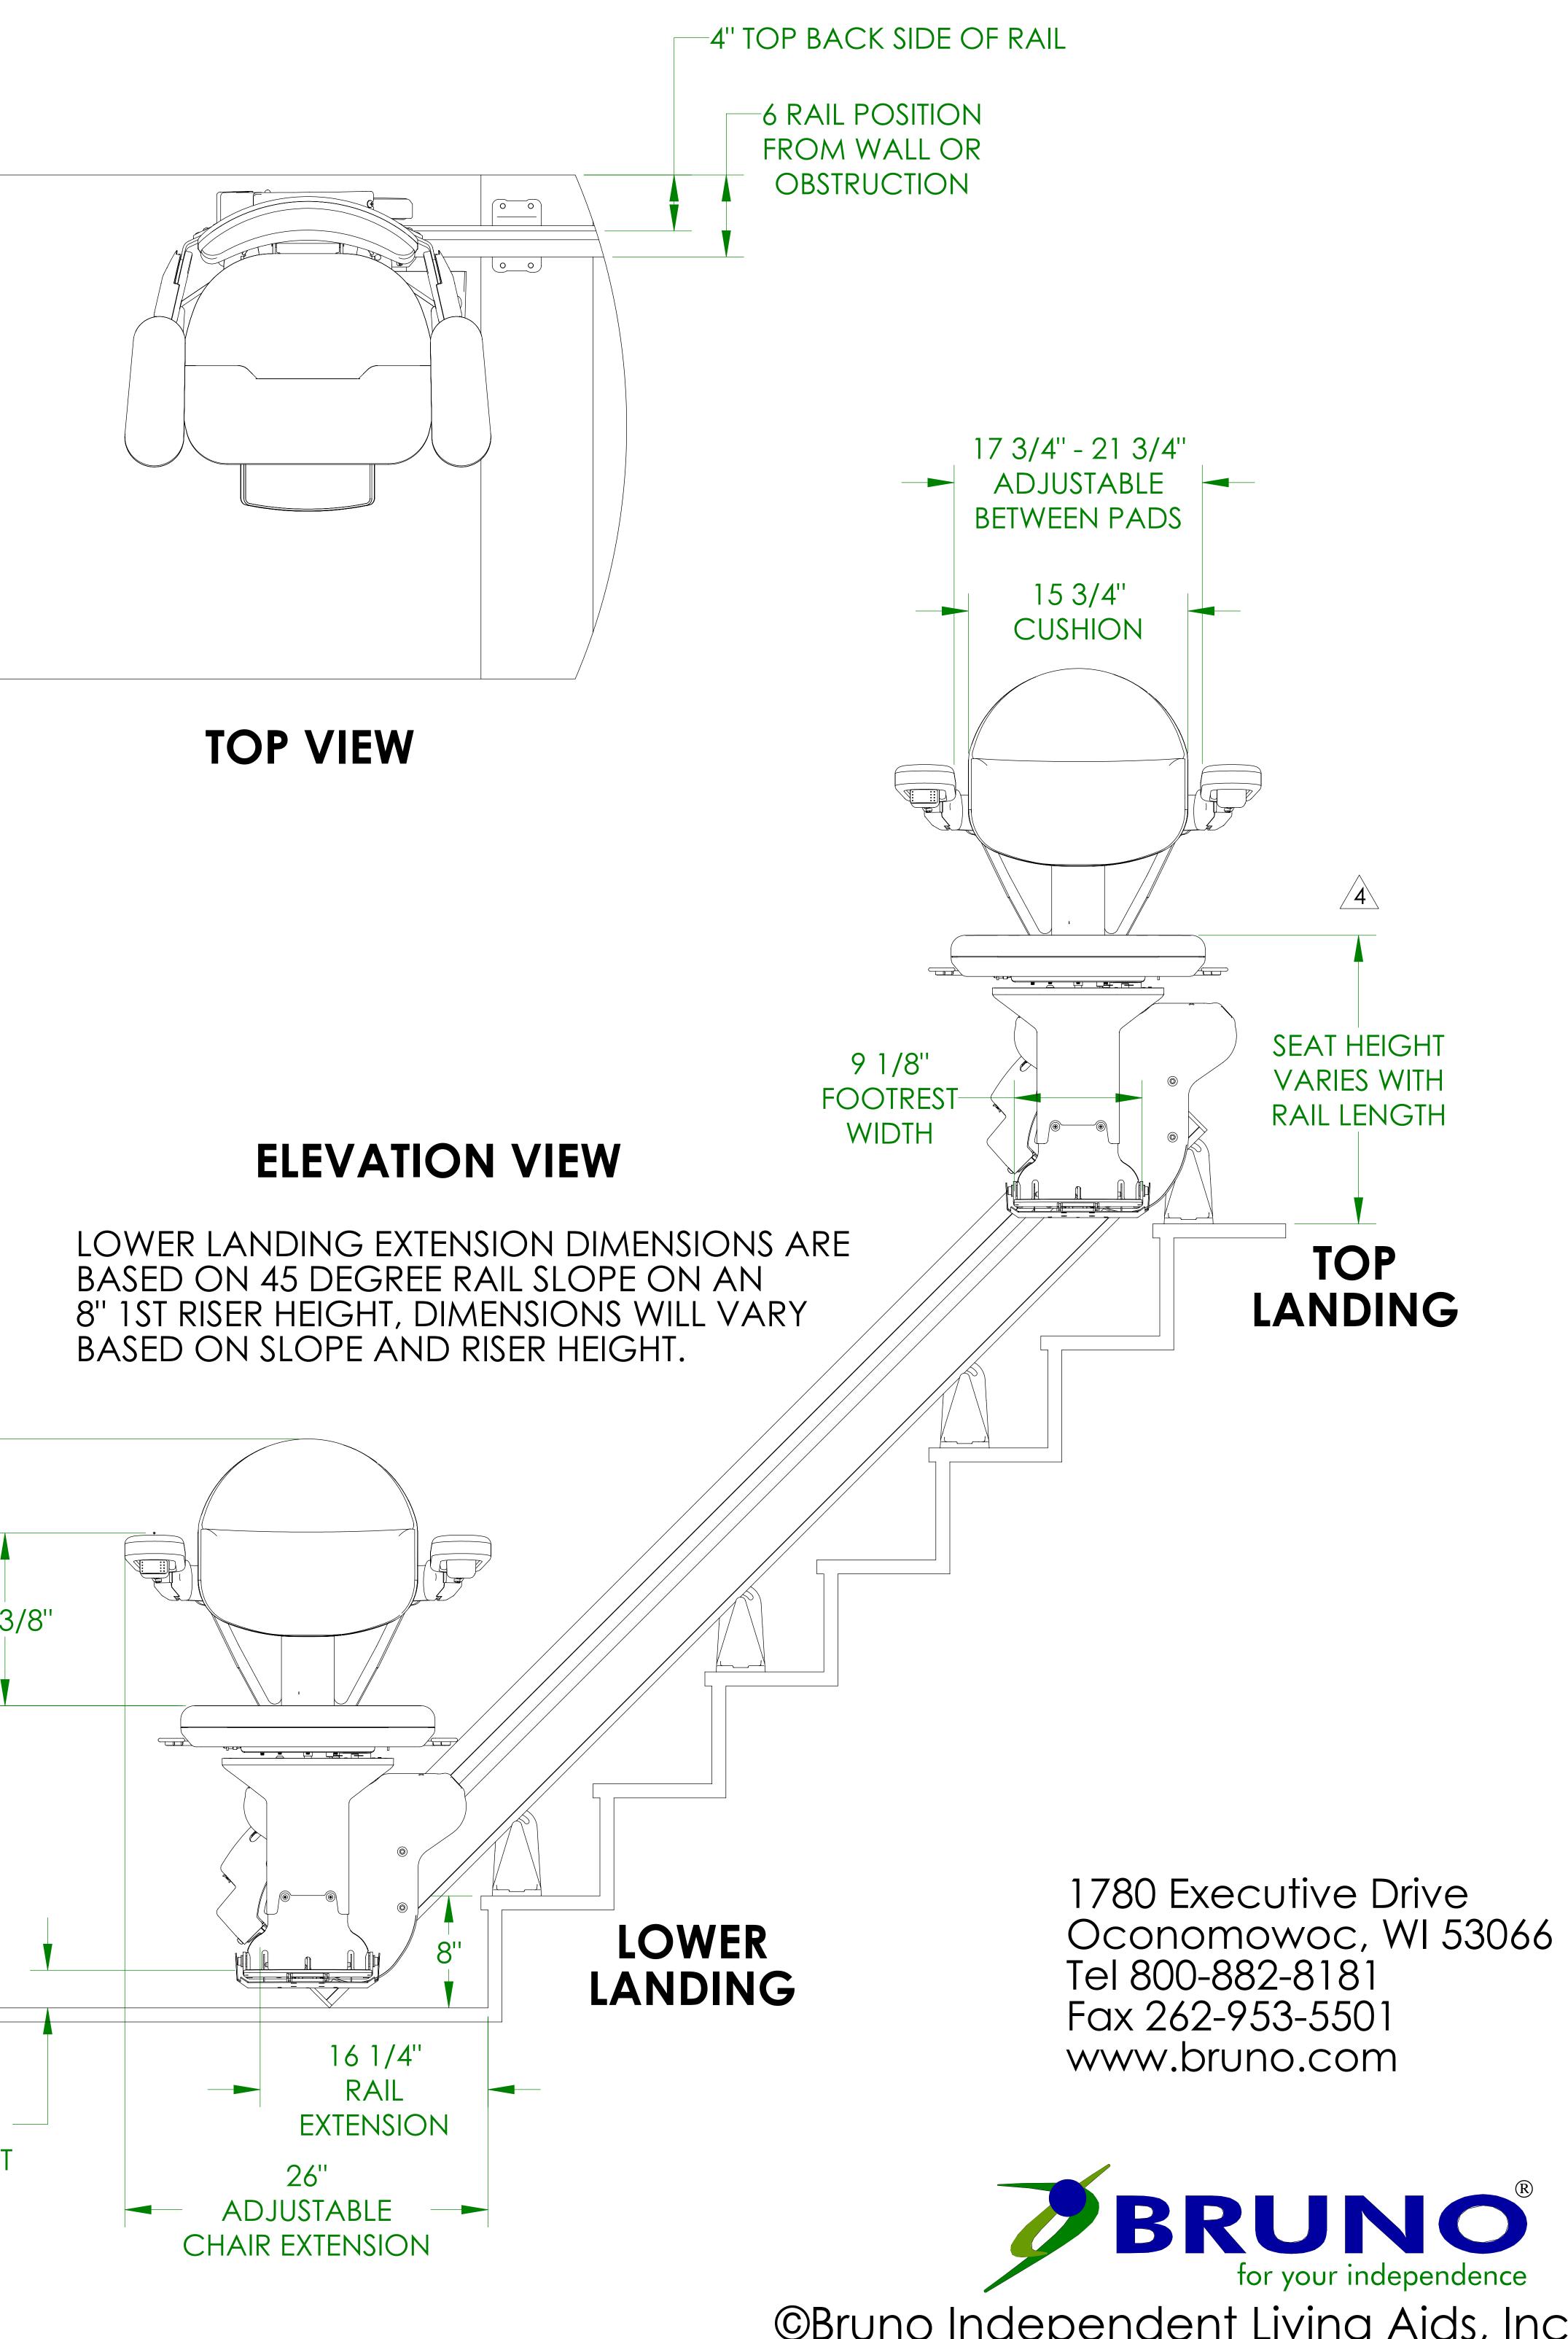


ILS-01343 SHEET 2 OF 3 $\tilde{\text{REV. 4}} (7259)(8/4/20)(\text{BHM})$


SEAT SWIVELED 60[°]

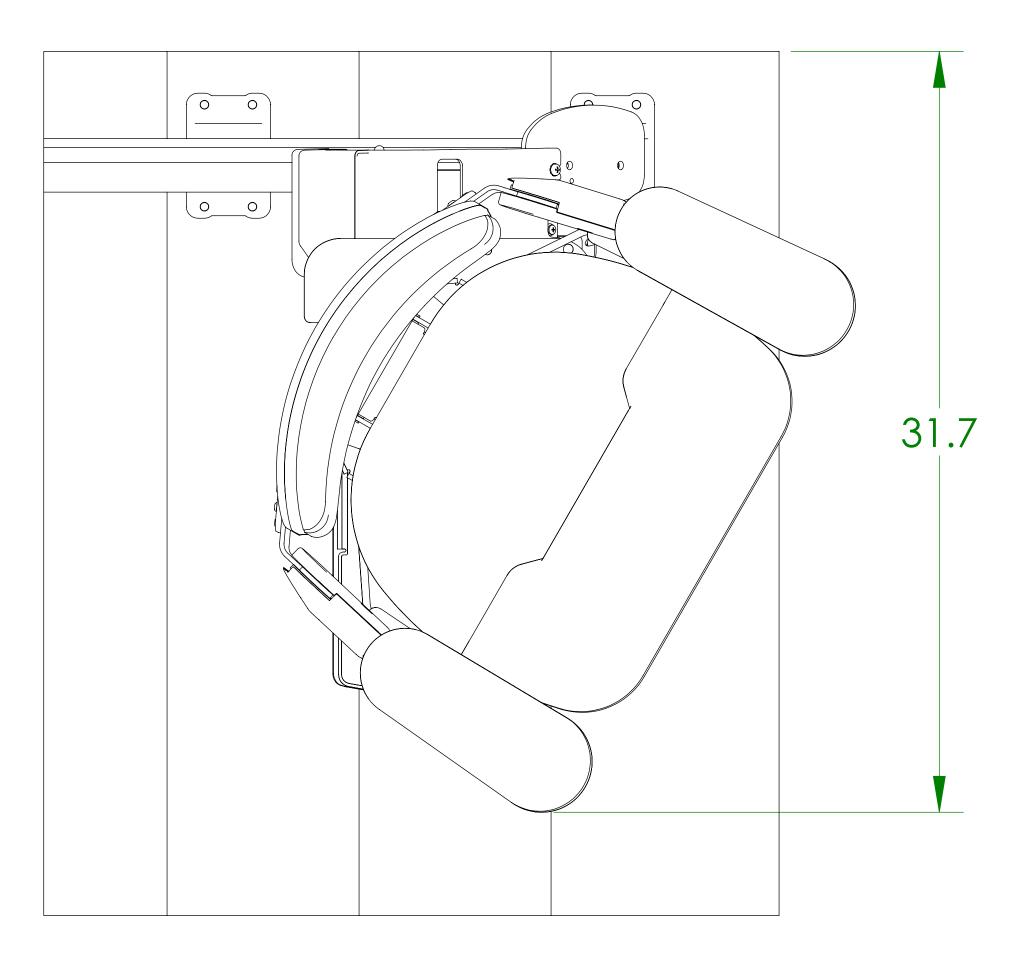

SRE-2010 DISTANCE FROM WALL - SEAT SWIVELED







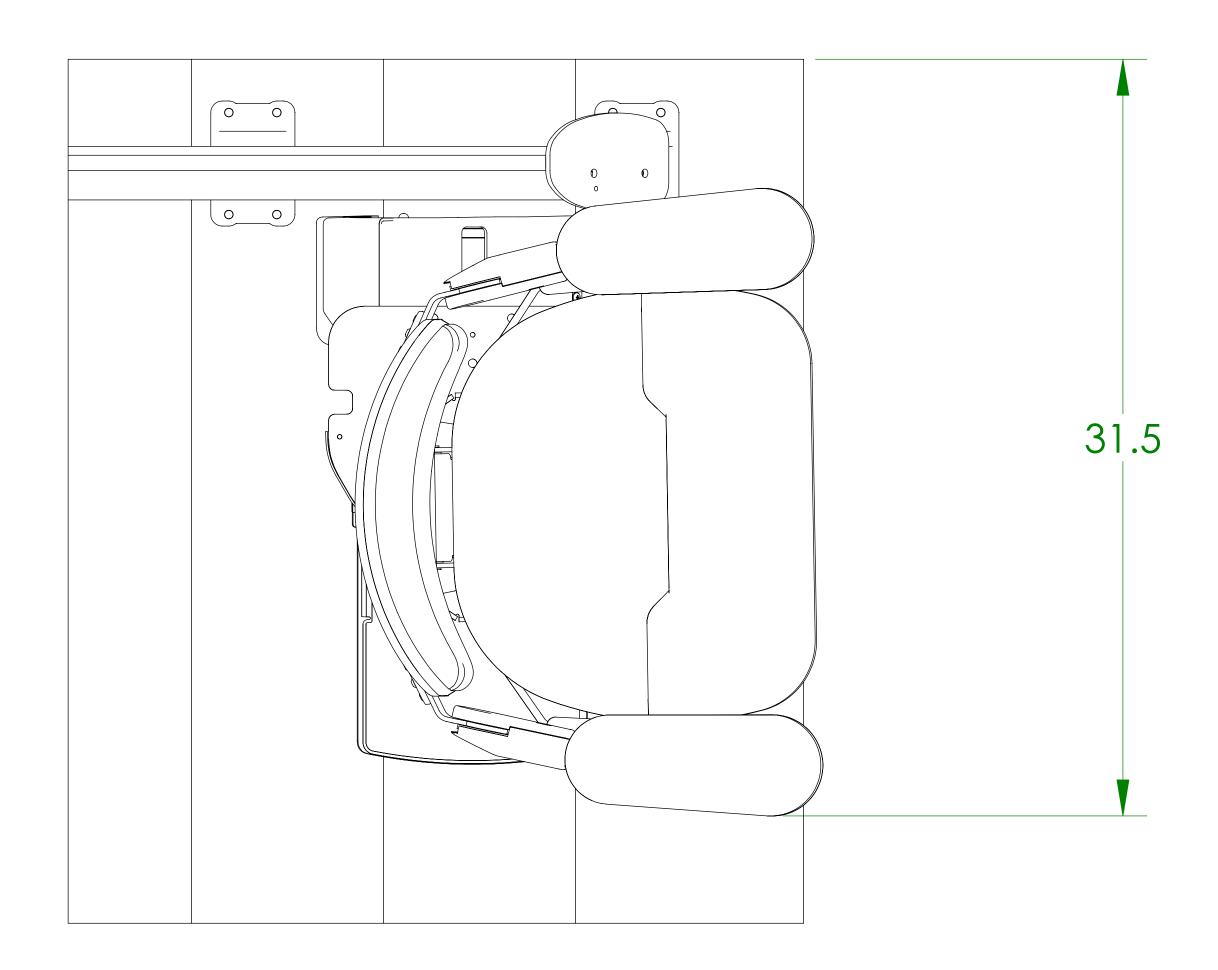

SEAT SWIVELED 90[°]

1780 Executive Drive Oconomowoc, WI 53066 Tel 800-882-8181 Fax 262-953-5501 www.bruno.com

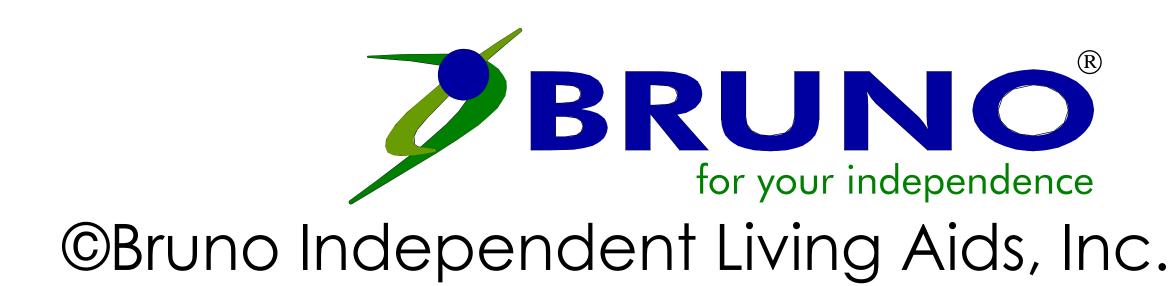

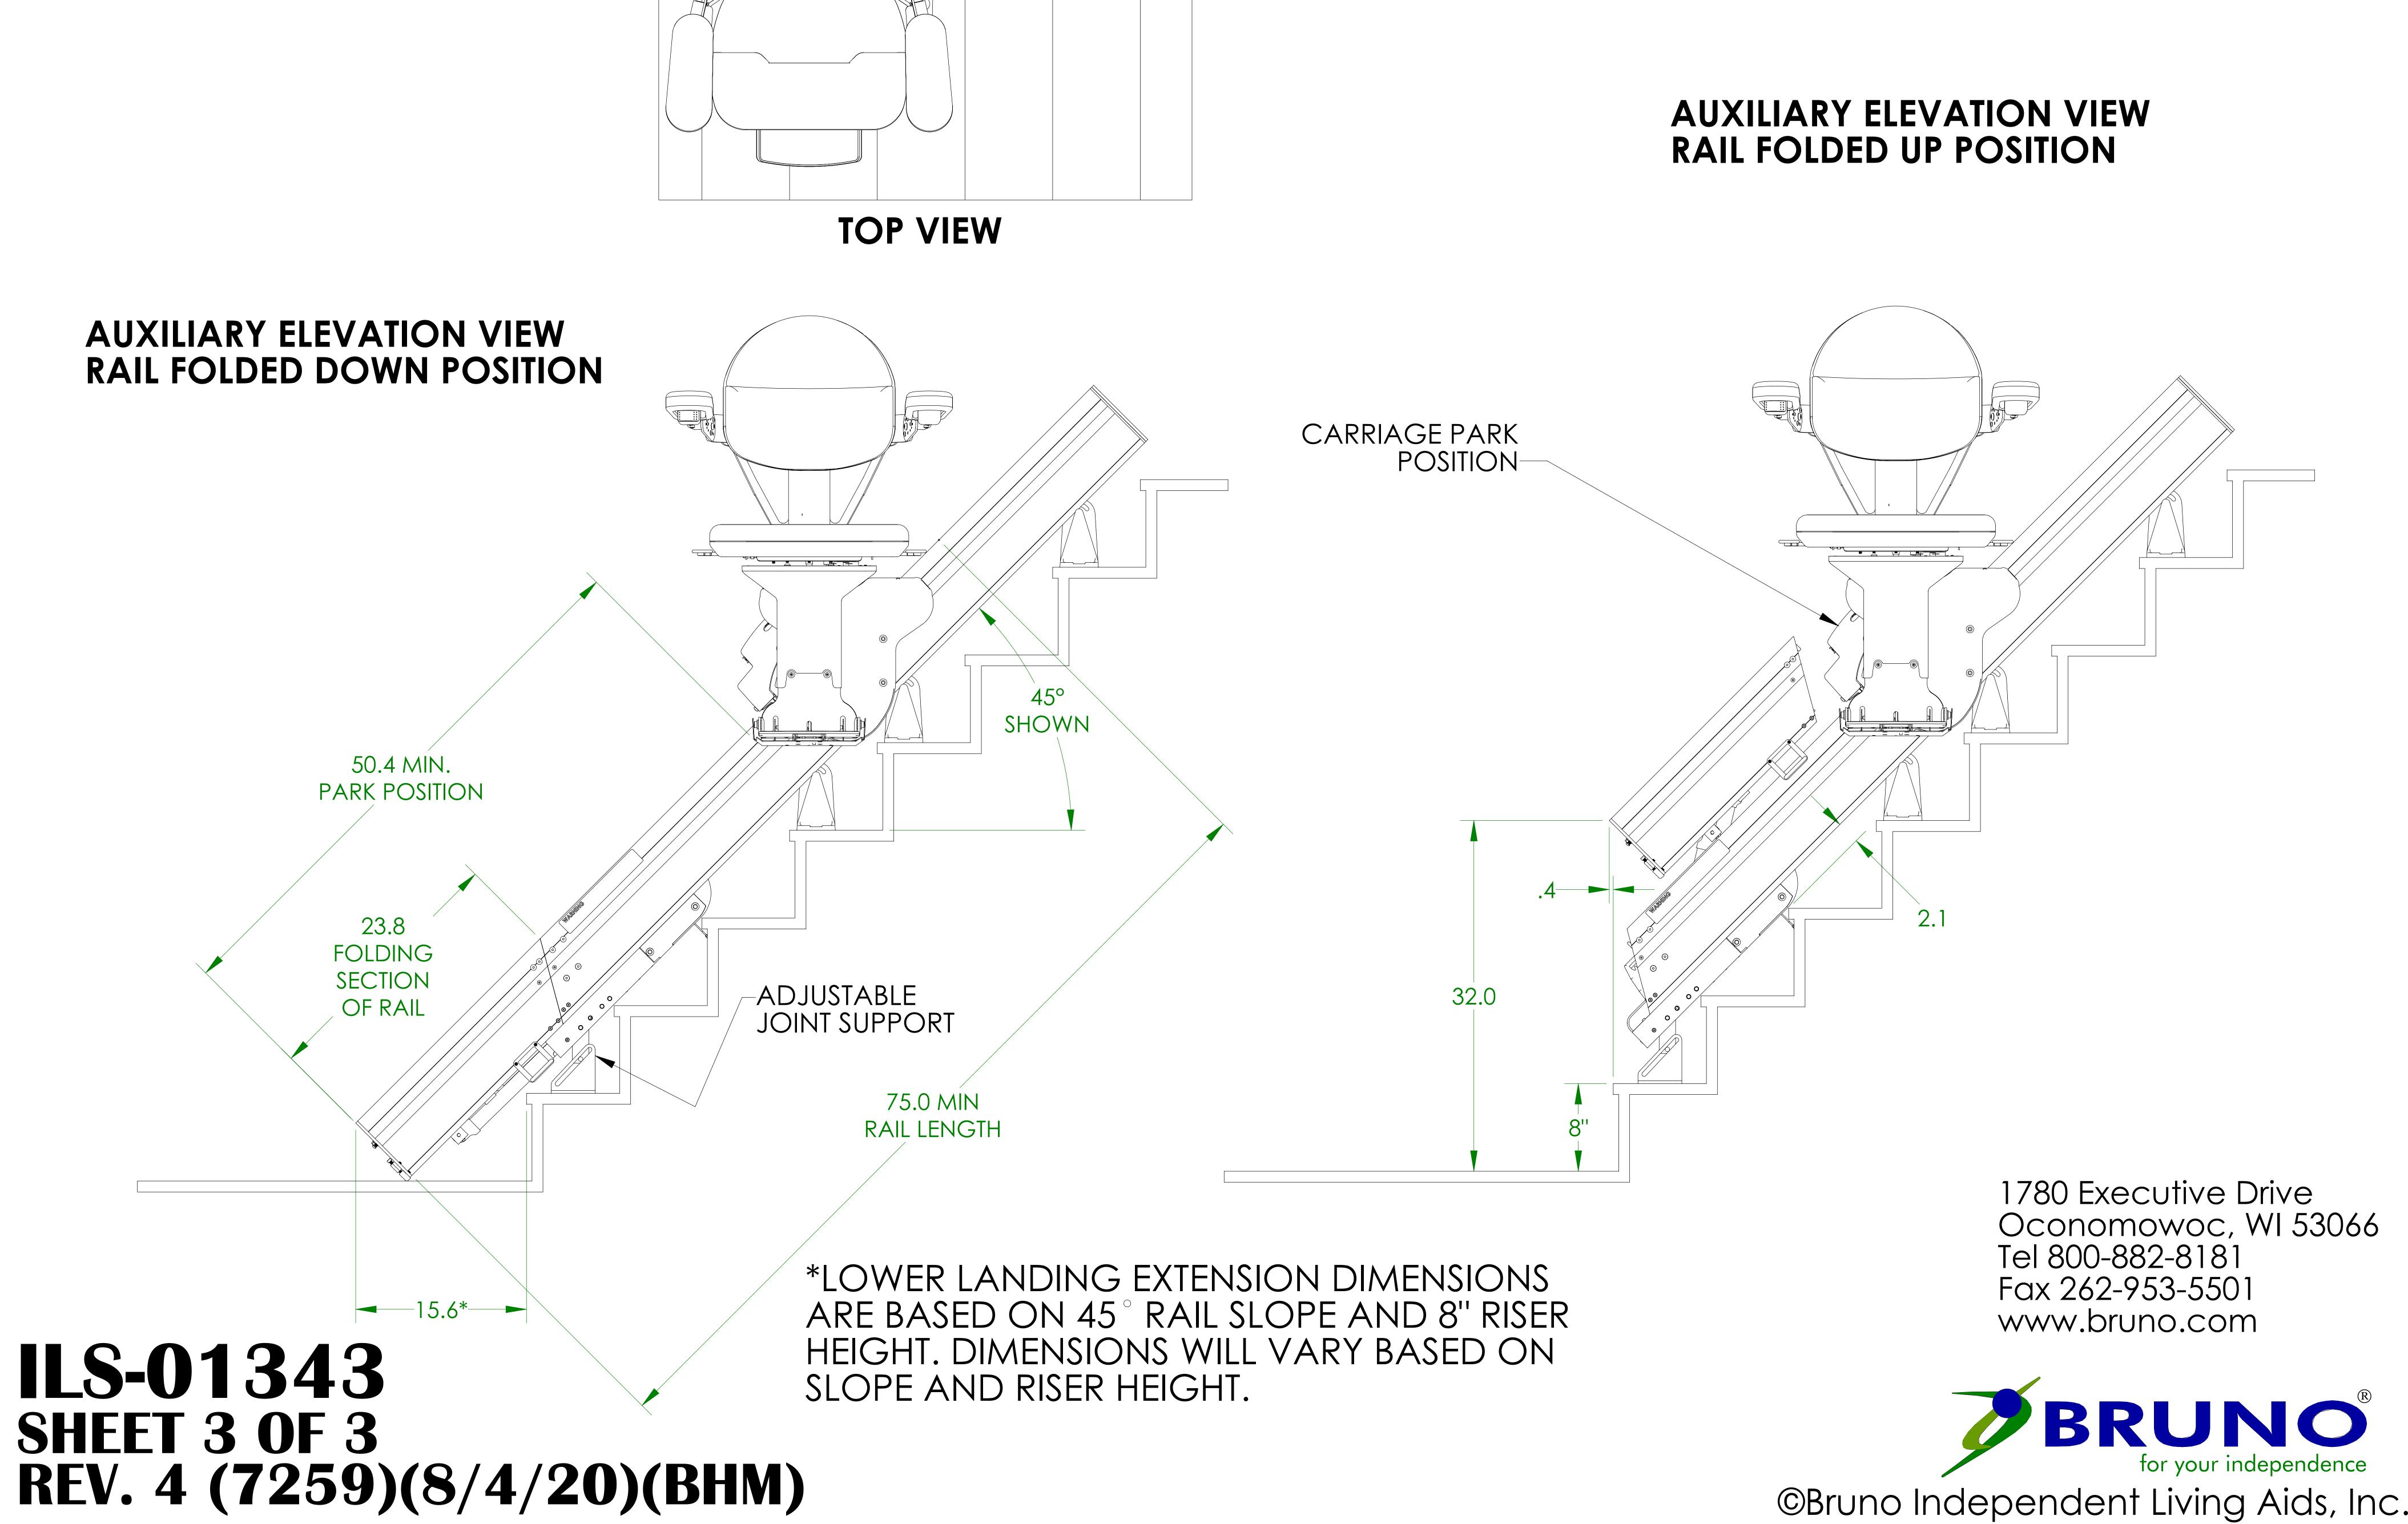

-4 TOP BACK SIDE OF RAIL 6 RAIL POSITION FROM WALL OR OBSTRUCTION $\left(\begin{array}{c} \circ & \circ \end{array} \right)$ O O 0_0

