TECHNICAL DATA/SPECIFICATION MODEL: SRE-3000 ELAN STRAIGHT RAIL STAIRLIFT, PRIVATE RESIDENCE ONLY

RATED LOAD: 300 LBS, ONE PASSENGER

POWER SOURCE: 24 VOLT DC COMPRISED OF (2) 3 AMP/HR 12 VOLT SEALED BATTERIES

105-230 VOLT AC 0.6 AMP, 24 VOLT DC 1 AMP CONTINUOUS MONITORING CHARGER. DRIVE: 24 VOLT DC DIRECT DRIVE SELF LOCKING POSITIVE GEARED MOTOR, 2 POLE RATED .18 HP MAX., RIGHT ANGLE WORM GEARBOX, 50Nm (442in.lb.) TORQUE MAX., 25.5 RPM SPEED MAX., 16 AMP CURRENT MAX.


SUSPENSION: RACK & PINION - INTEGRATED 8DP GEAR RACK ON RAIL WITH SPUR GEAR ON THE OUTPUT SHAFT OF GEARBOX.

BRAKING: DYNAMIC MOTOR BRAKING THROUGH THE MOTOR CONTROLLER, WORM GEAR, ELECTRO-MECHANICAL MOTOR BRAKE AND OVERSPEED PROTECTION.


CONTROLS: CONTINUOUS PRESSURE ROCKER SWITCH LOCATED ON THE ARMREST AND WALL MOUNTED CALL/SEND CONTROLS LOCATED AT BOTH THE TOP AND BOTTOM LANDINGS.

ANGLES: 22 TO 45 DEGREES (SPECIALS UP TO 52 DEGREES), RIGHT OR LEFT HAND ORIENTATIONS.

FINAL LIMIT SWITCH: STANDARD

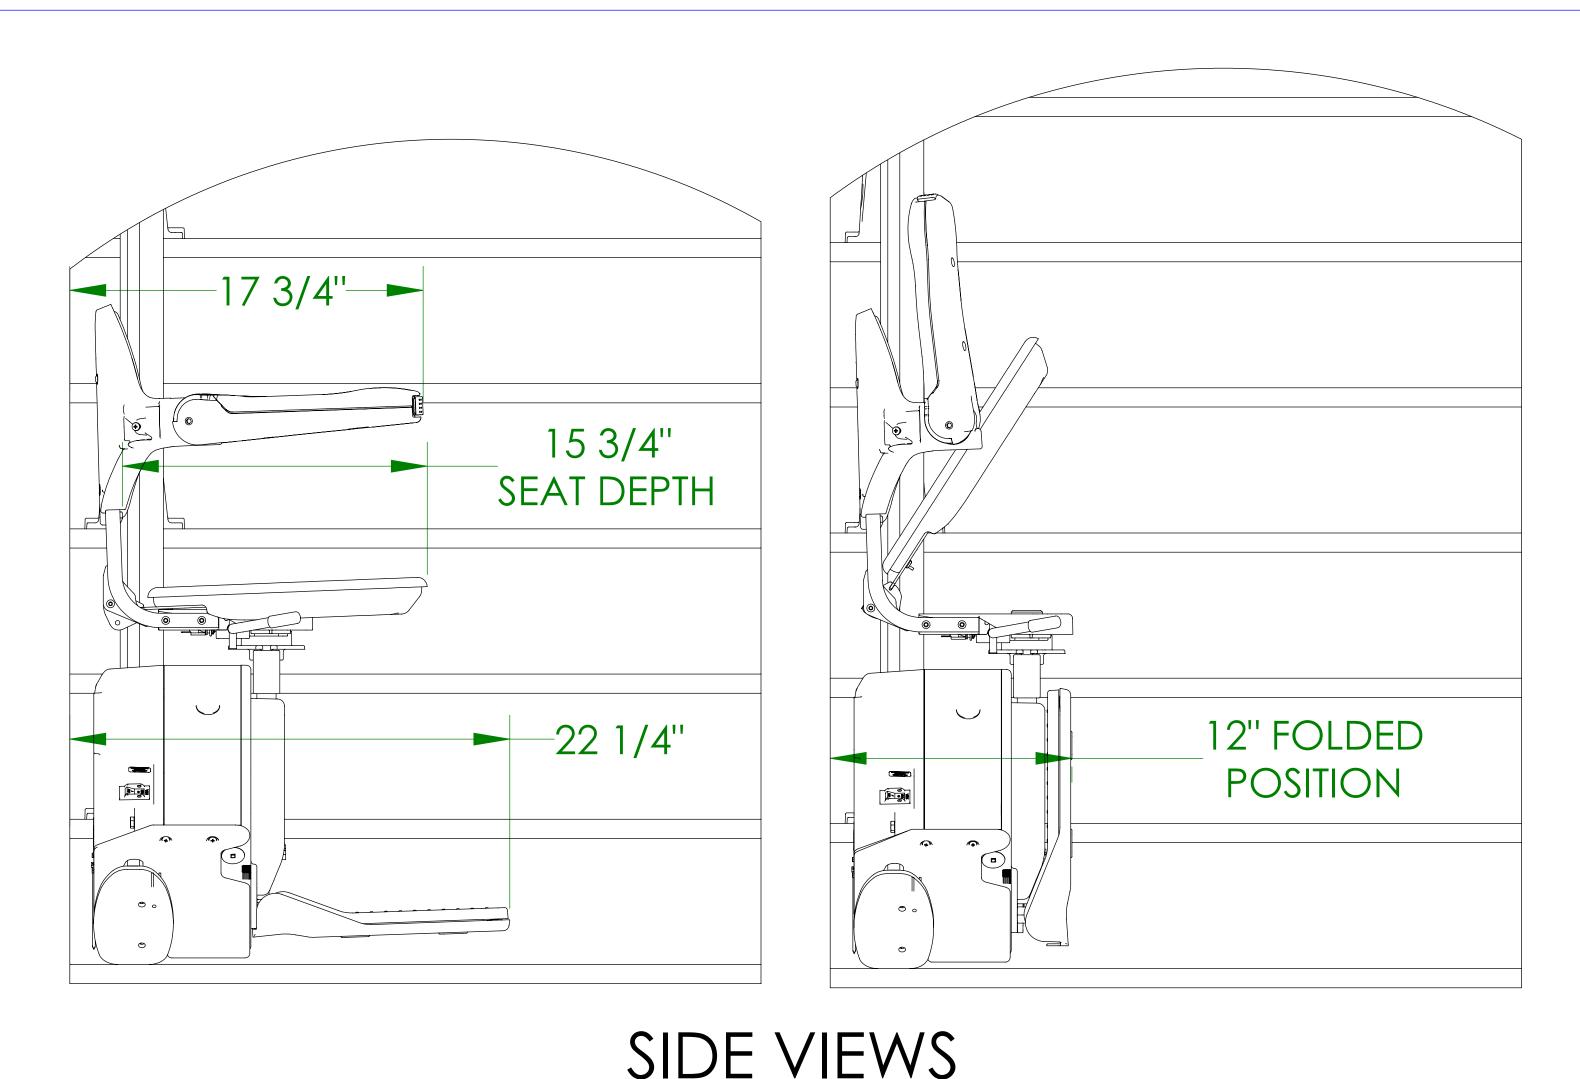


DIMENSIONS SHOWN IN SIDE VIEWS **ILS-01345** ARE BASED ON 4-1/2" RAIL POSITION FROM WALL OR OBSTRUCTION **SHEET 1 OF 3** REV. 2 (66661)(5/18/18)(JCR)

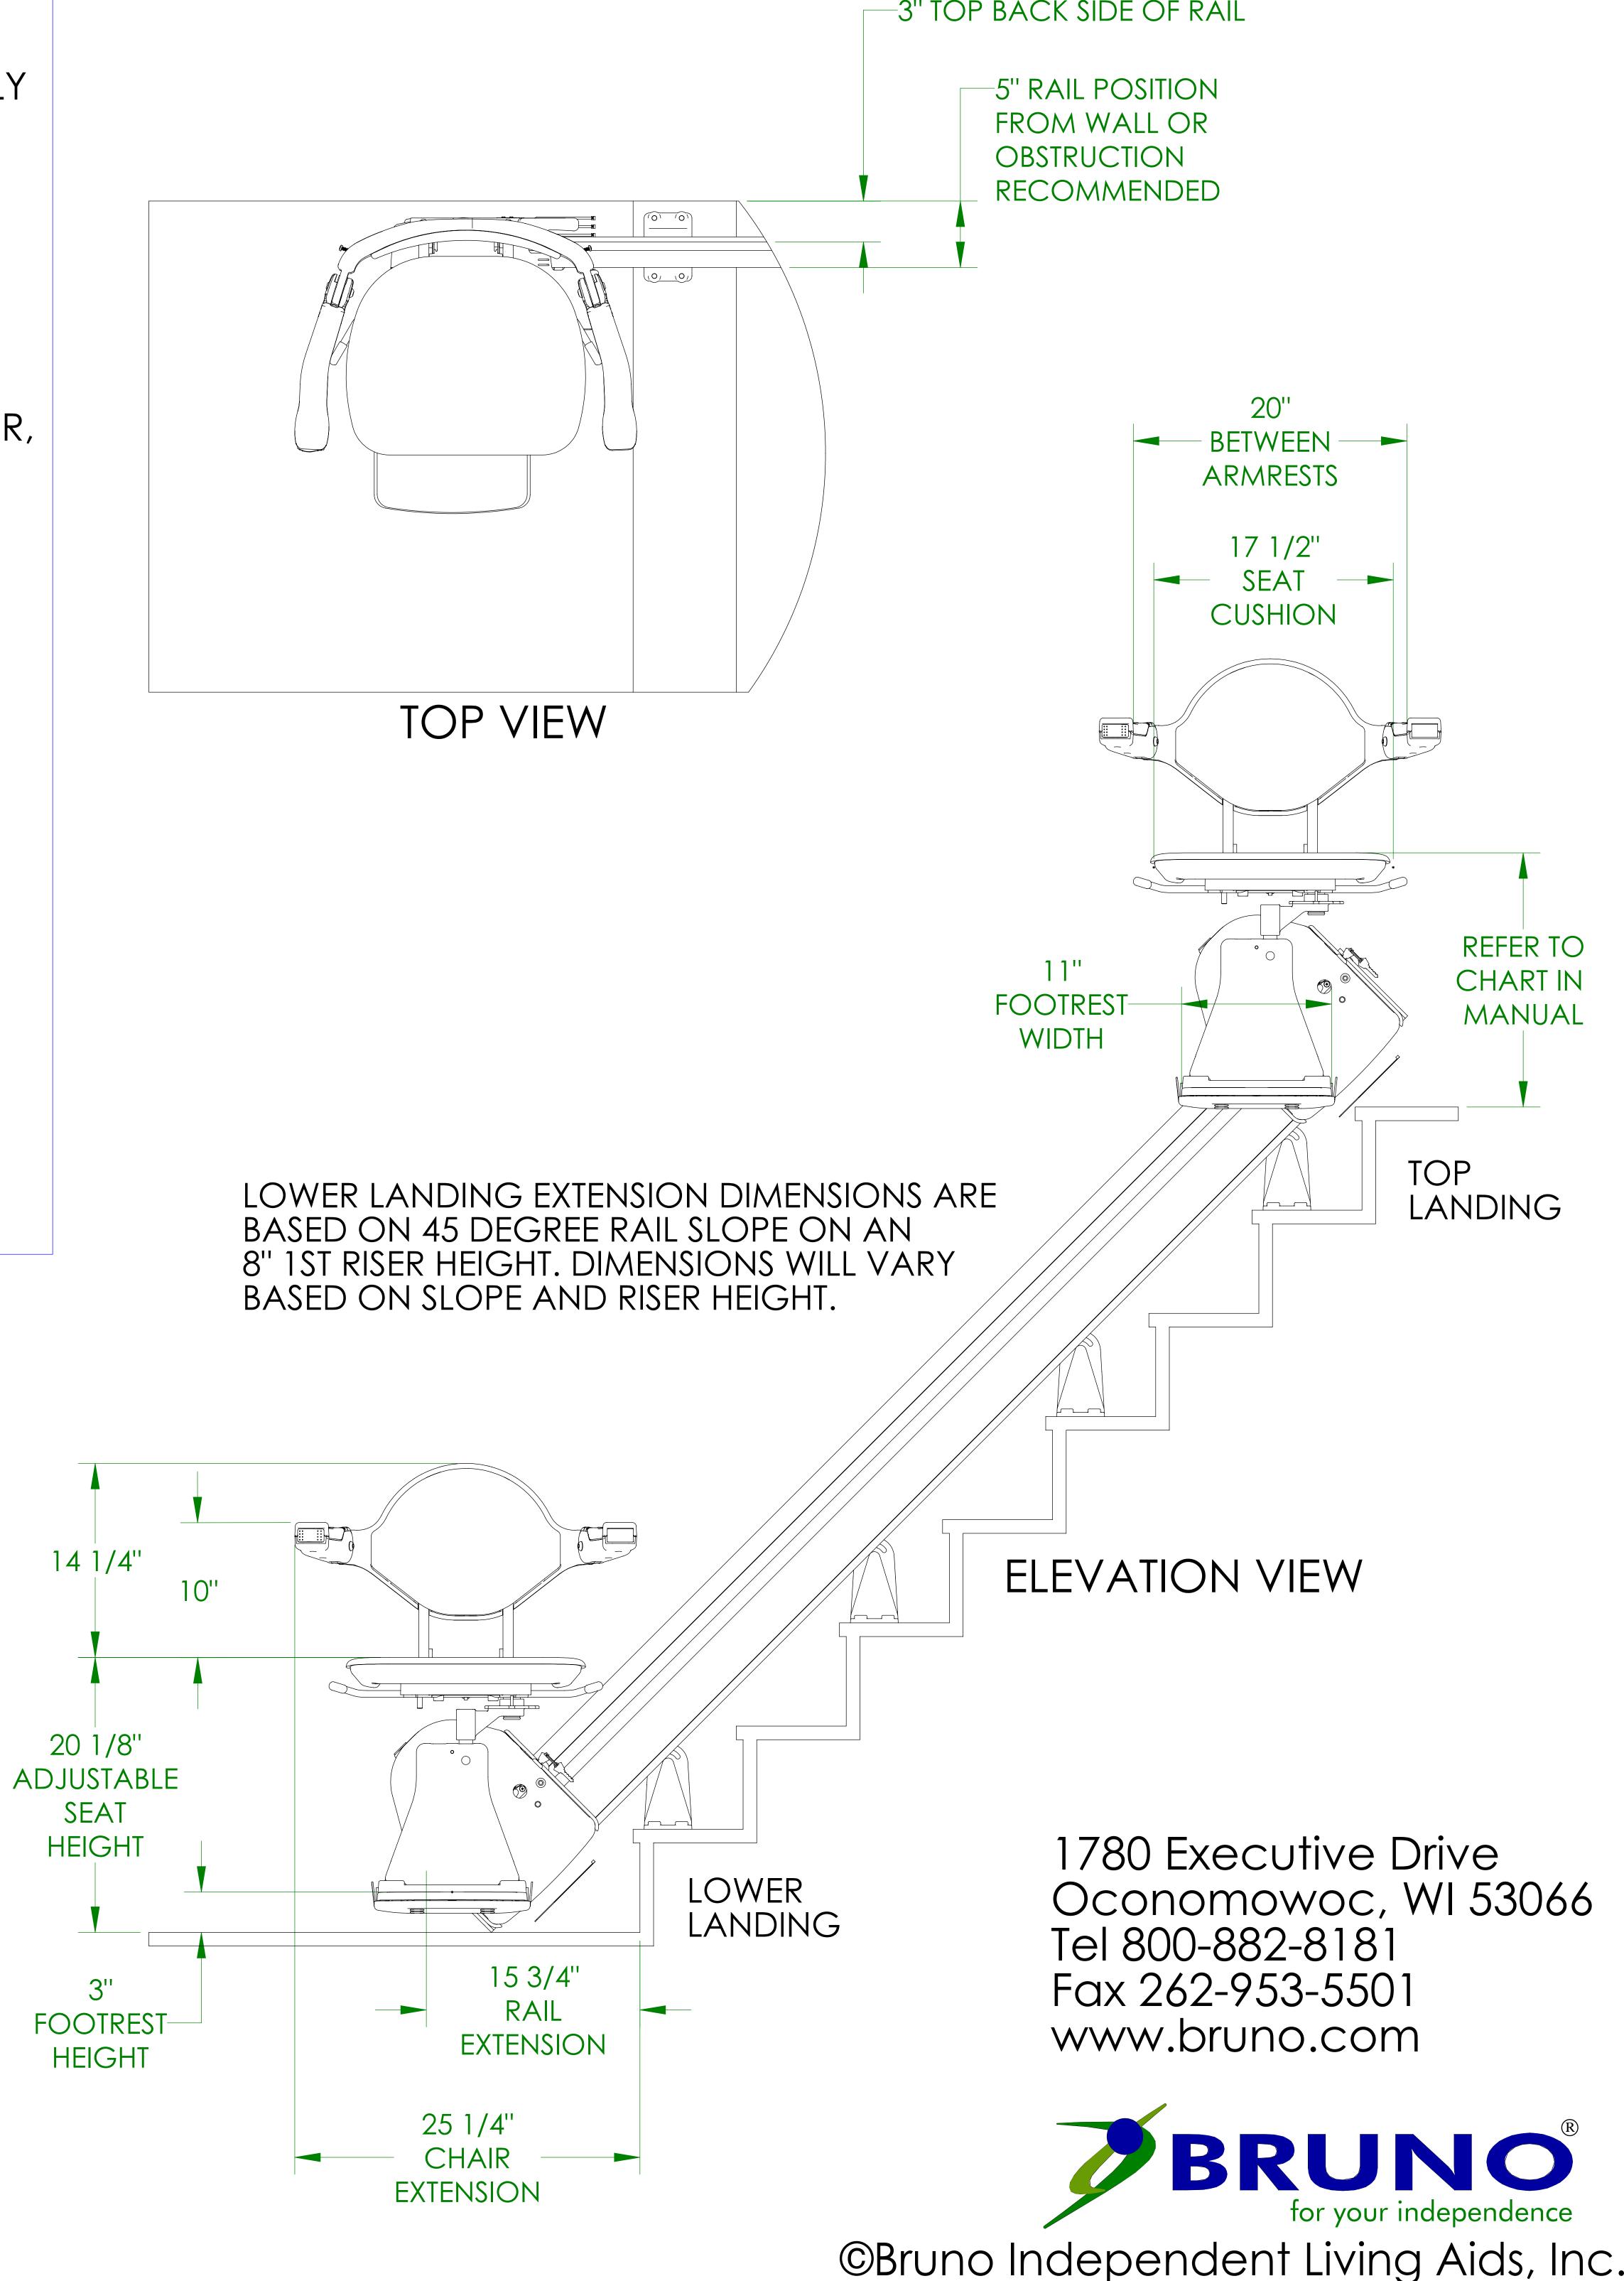

$\left(\begin{array}{c} 0 \\ \end{array} \right)$

ILS-01345 SHEET 2 OF 3 REV. 2 (6661)(5/18/18)(JCR)


SRE-3000 DISTANCE FROM WALL - SEAT SWIVELED

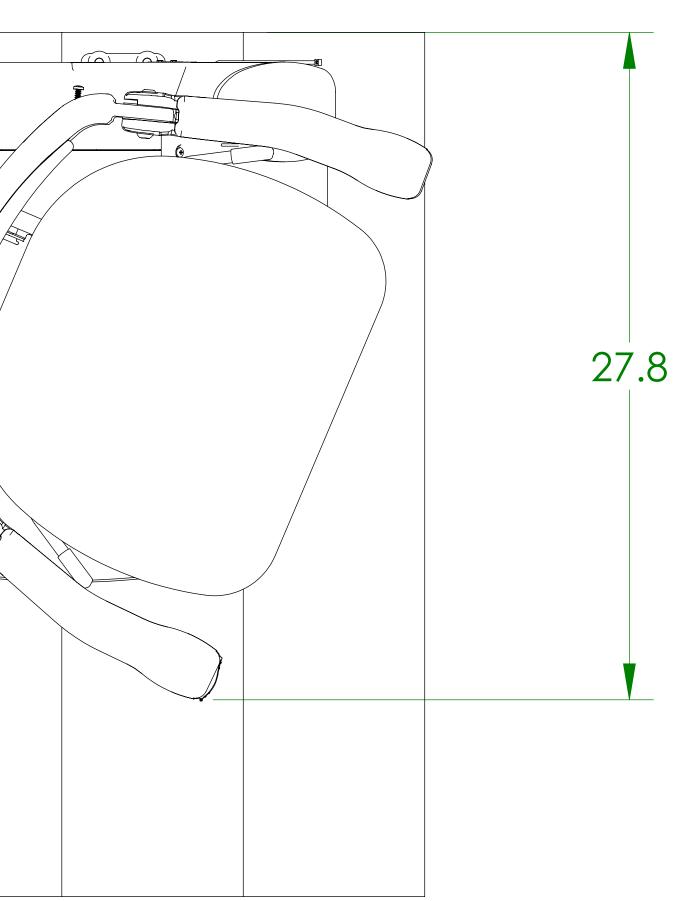

SEAT SWIVELED 67[°]






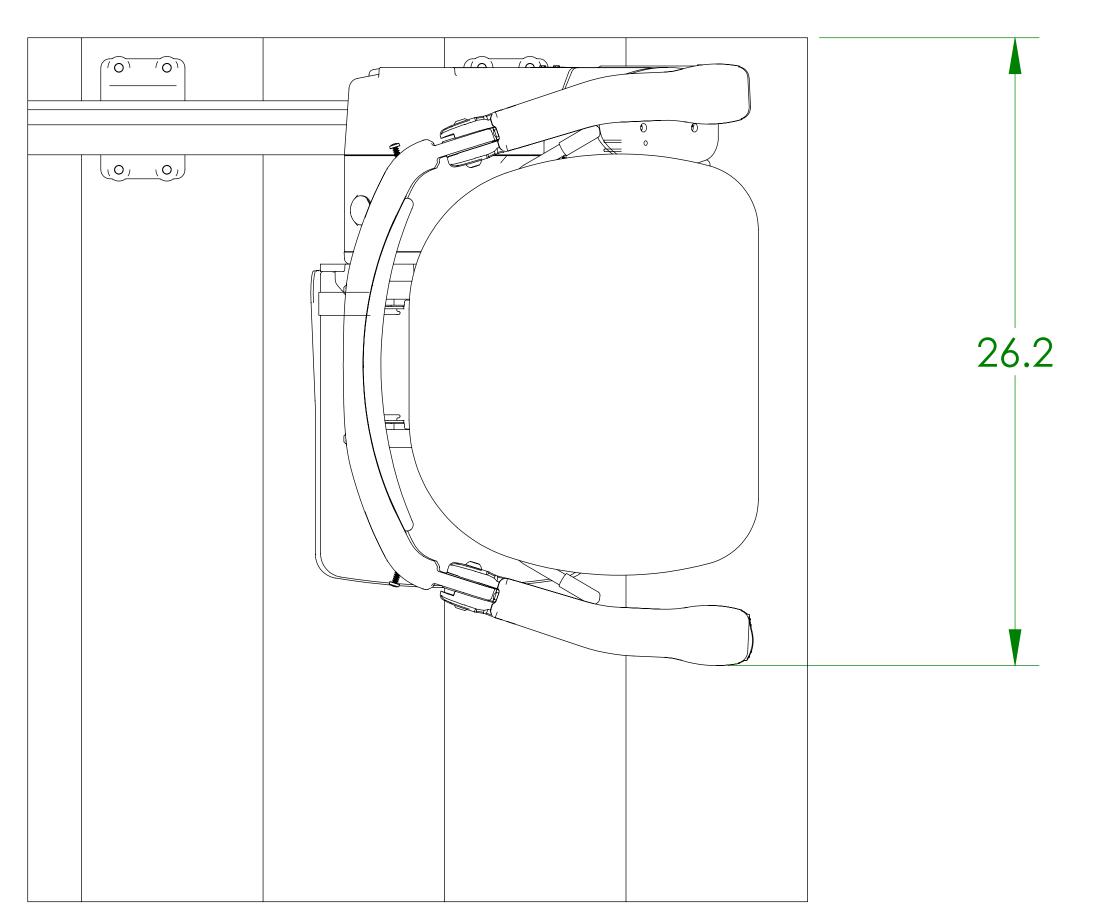

SEAT SWIVELED 90[°]



AUXILIARY ELEVATION VIEW RAIL FOLDED DOWN POSITION

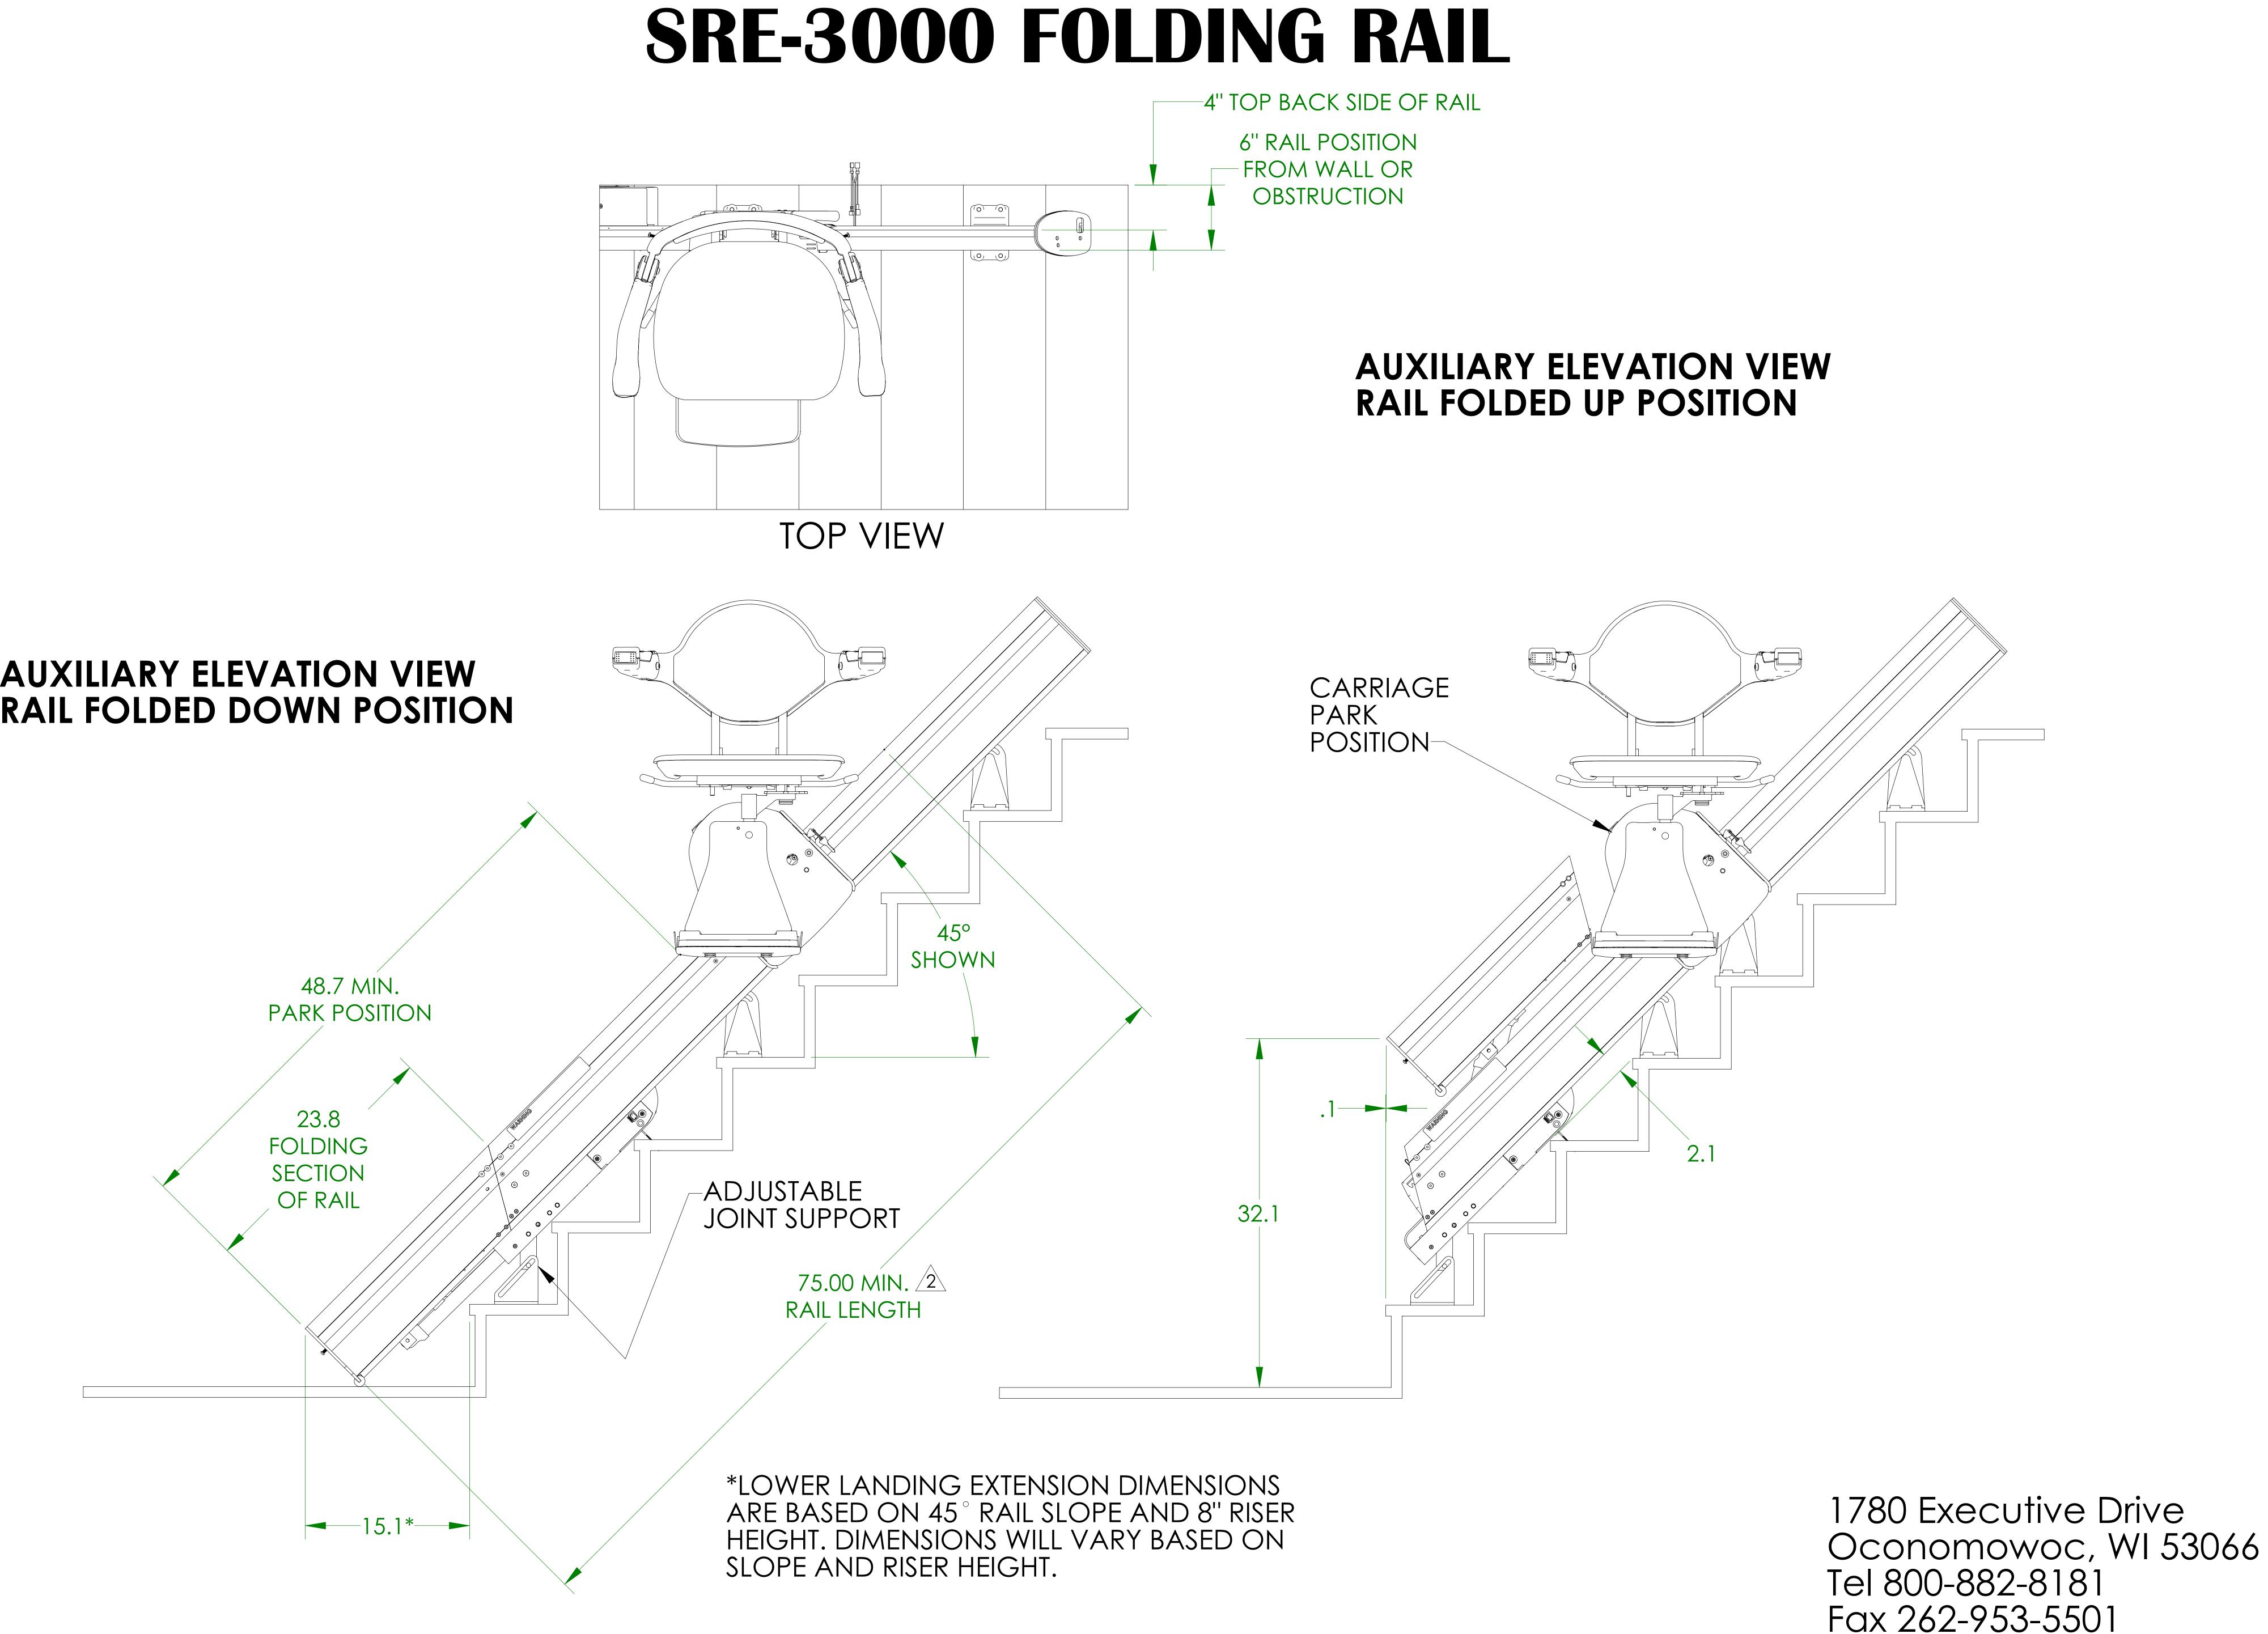

ILS-01345 Folding Rail SHEET 3 OF 3 REV. 2 (6661)(5/18/18)(JCR)

