
TYPICAL MACHINE ROOM LAYOUT TELEPHONE CONNECTION PUMP UNIT (SEE DETAIL FOR SIZES) WITH CONTROLLER (24"x24"x9") MOUNTED ABOVE P/U (FLUSH OPTIONAL) SOPE П ALTERNATE LOCATION FOR CONTROLLER ELECTRICAL П CLEAR П \parallel 3,-6" NATIONAL Ш ||3'-6" CLEAR PER NATIONAL ELECTRICAL CODE IL LIGHT SW. & GFI MAIN LINE DISCONNECT & CAB LIGHTING DISCONNECT 1'-0" 1'-3" 2'-6" MIN. CLEAR 4'-9" RECOMENDED MINIMUM




- NOTES:

 1) SHOWN WITH CONTROLLER MOUNTED TO PUMP UNIT. CAN BE SUPPLIED LOOSE FOR WALL MOUNTING.

 2) #2 TANK IS USED WHEN TRAVELS EXCEED 40'-0" AND FOR 10 HP MOTORS.

 3) OIL OUTLET LOCATED ON RIGHT OR LEFT SIDE.

ALTERNATE MACHINE ROOM LAYOUT

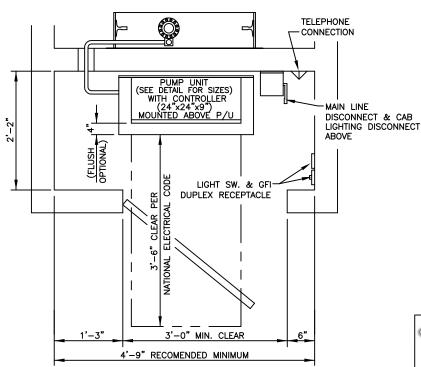

ASME A17.1.RULE 3,19,3.3.1
FLEXIBLE HOSE AND FITTING
ASSEMBLIES SHALL NOT BE
INSTALLED WITHIN THE HOISTMAY
NOR PROJECT INTO OR THROUGH
ANY WALL
PIPE MATERIAL AND ASSOCIATED
FITTINGS SHALL COMPLY WITH ASME
A17.1, SECTION 3.19 AND SHALL BE
FUNNISHED BY THE ELEVATOR
CONTRACTOR.

Machine Rooms



Custom Elevator Mfg. Co., Inc. 5191 Stump Road

Plumsteadville, PA 18949 Toll Free: 888-443-2800 Fax: 215-766-3385

ROPED HYDRAULIC RESIDENTIAL ELEVATOR